



INVERTER FLOOR STANDING TYPE UNIT

Standard Features



Louver Position
Memory



Independent
Dehumidification



Turbo



Anti-rust Cabinet



Easy Cleaning
Panel



4D Air Flow



Self diagnosis and
Auto-protection

A5FSY32FR-M

OUTSTANDING FEATURES

Floor Standing




4D Airflow

The unit has horizontal swing and auto vertical swing function, which supplies more even and comfortable air flow.



Silver Ion Filter

Sterilize bacteria effectively by decomposing cell wall of bacteria.

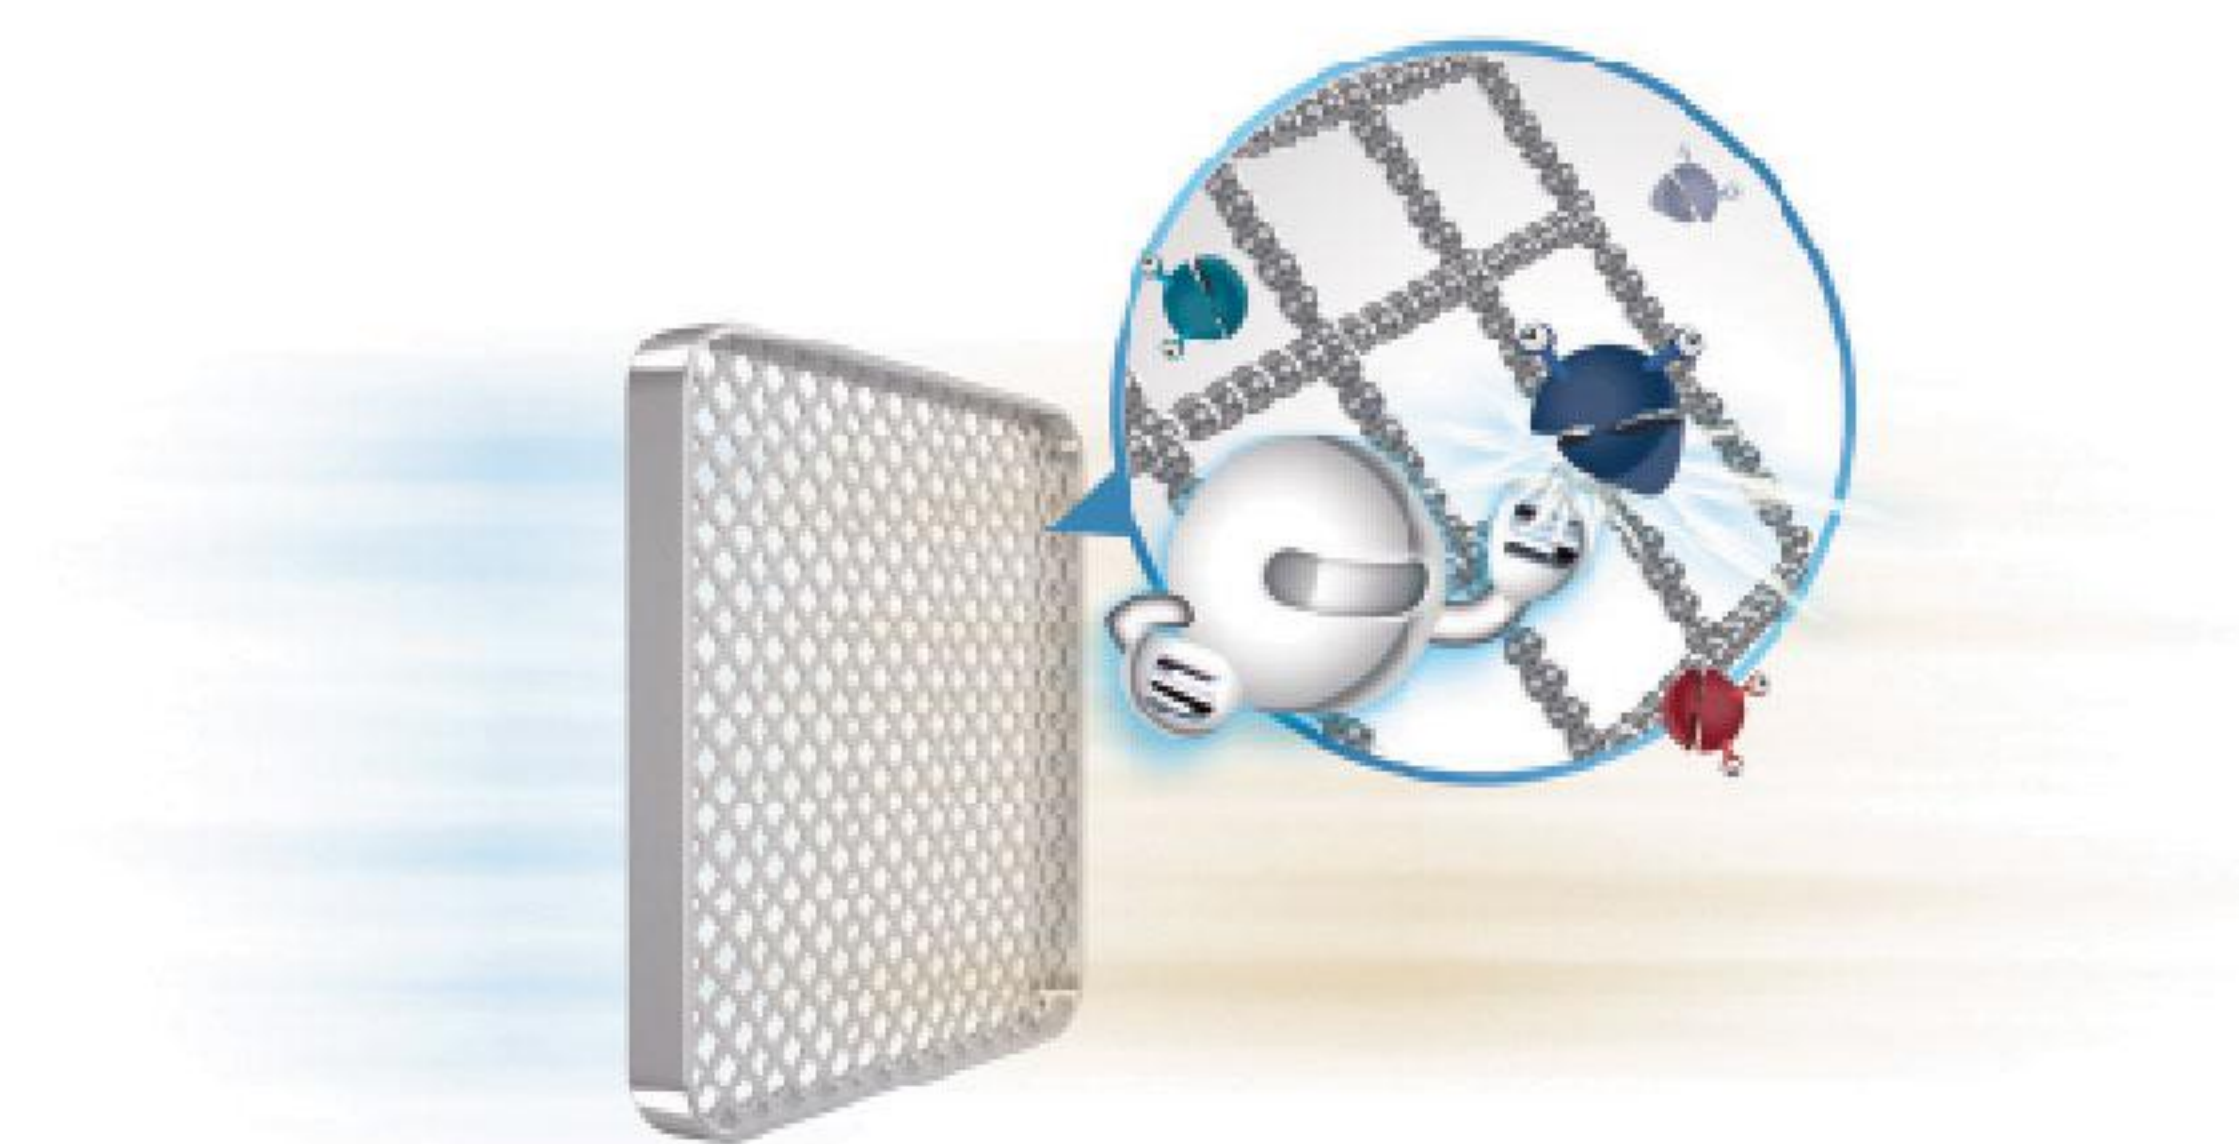


Self-diagnosis & Auto Protection

Once abnormal operation or parts failure happens, the unit will shut down automatically to protect the system. Meanwhile it will indicate protection or error code for fast servicing.



Golden Fin

The unique anticorrosive golden coating on the condenser can withstand the salty air, rain and other corrosive elements. It also effectively prevents bacteria from breeding and improve heat transfer efficiency.

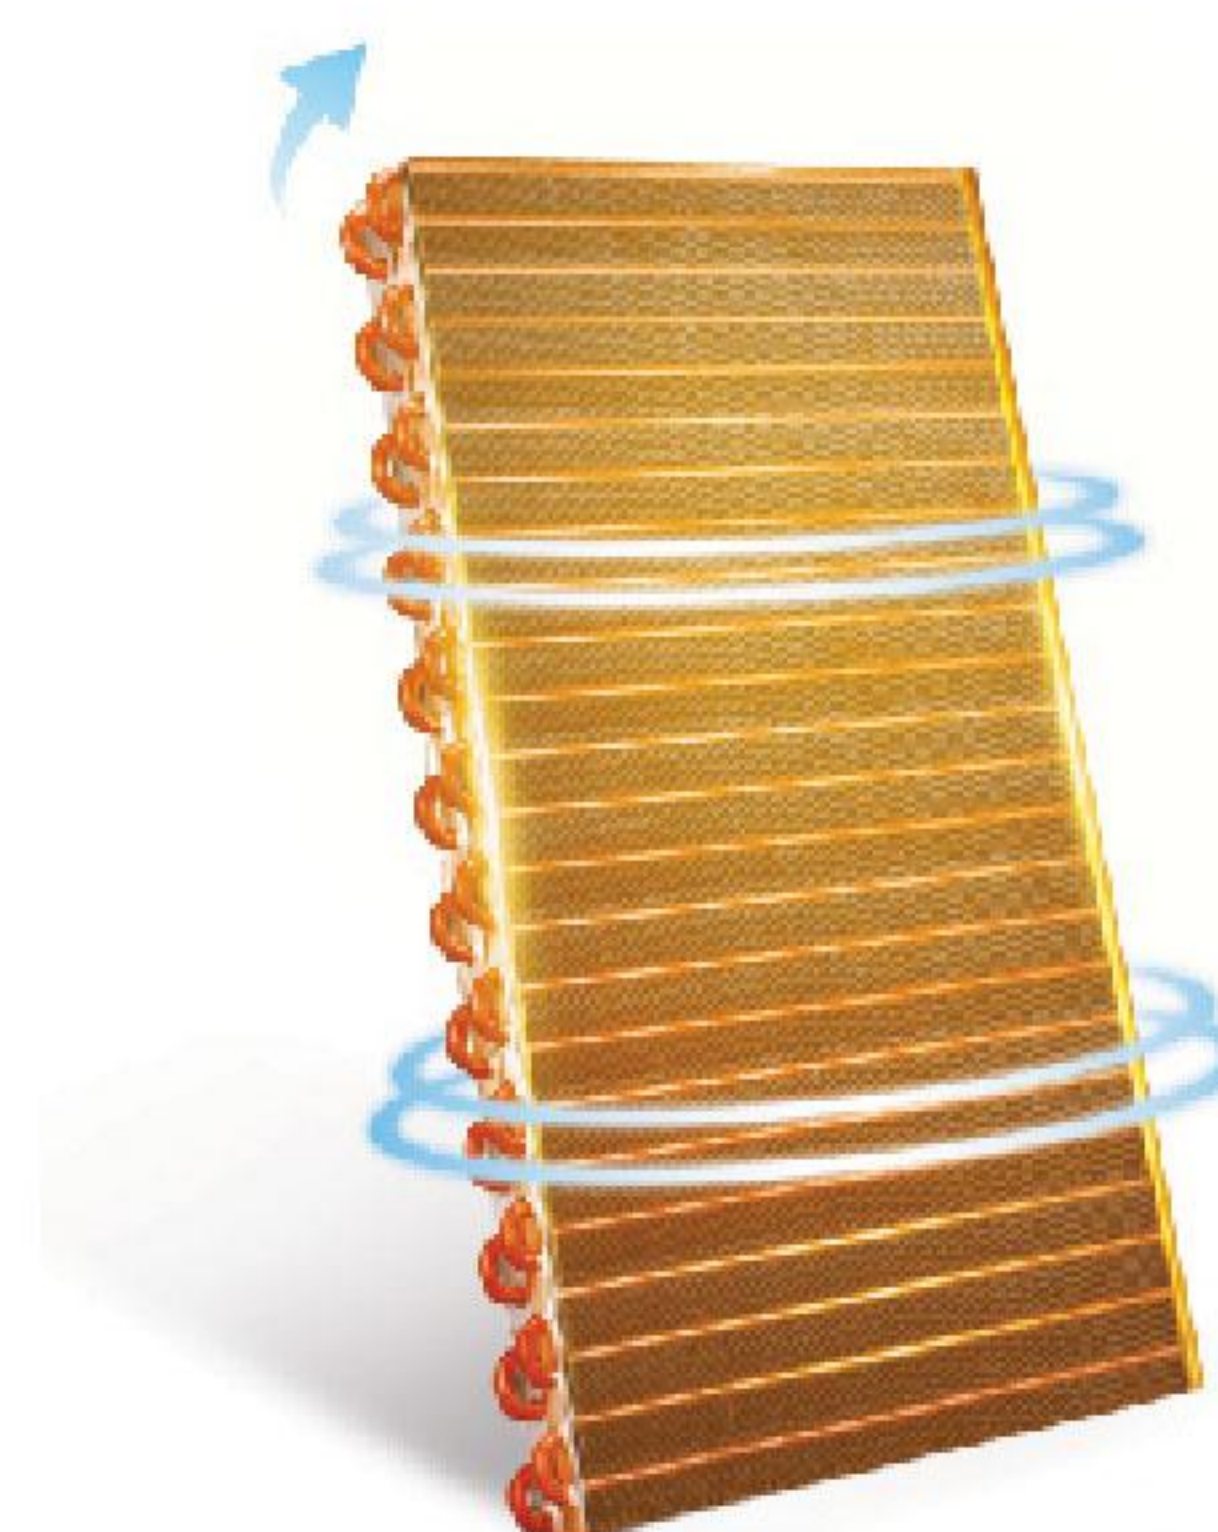

THE COOLEST



OF COOL

INVERTER FLOOR STANDING TYPE UNIT (SPECIFICATIONS)

Indoor			A5FSY32FR-M
Outdoor			A5LCY32CR-M
Power Supply		V/Ph/Hz	220 - 240/1/50
Cooling	Capacity	Btu/h	32000 (12800 - 35200)
	Input Power	W	3030 (1212 - 3335)
	Operating Current	A	13.2 (5.5 - 15.1)
	EER	W/W	3.00
Heating	Capacity	Btu/h	33000 (13200 - 36300)
	Input Power	W	2940 (1176 - 3234)
	Operating Current	A	12.8 (5.34 - 14.7)
	COP	W/W	3.29
Indoor unit	Dimension (W*D*H)	mm	540 X 410 X 1825
	Packing (W*D*H)	mm	1965 X 690 X 565
	Net/Gross Weight	kg	50.2/67.3
Indoor air flow (Hi/Mi/Lo)		m3/h	1647/1491/1188
Indoor noise level (Hi/Mi/Lo)		dB (A)	57/52/46
Outdoor unit	Dimension (W*D*H)	mm	946 X 410 X 810
	Packing (W*D*H)	mm	1090 X 500 X 885
	Net/Gross Weight	kg	63.2/67.9
Outdoor air flow		m3/h	3800
Outdoor noise level		dB (A)	63.0
Refrigerant type/Charge		Type/kg	R410A/2.6
Refrigerant piping	Liquid Side/Gas Side	mm (inch)	9.52mm (3/8in)/19mm (3/4in)
	Max. Refrigerant Pipe Length	m	30
	Max. Elevation	m	20