

INVERTER FLOOR STANDING TYPE UNIT



A5FSY50FR-M


4D Airflow

Direct airflow horizontally and vertically with a wider air outlet angle for a more uniform room temperature.




Elegant Design

The minimalistic design not only makes the air conditioner look beautiful but also simplifies its operation.

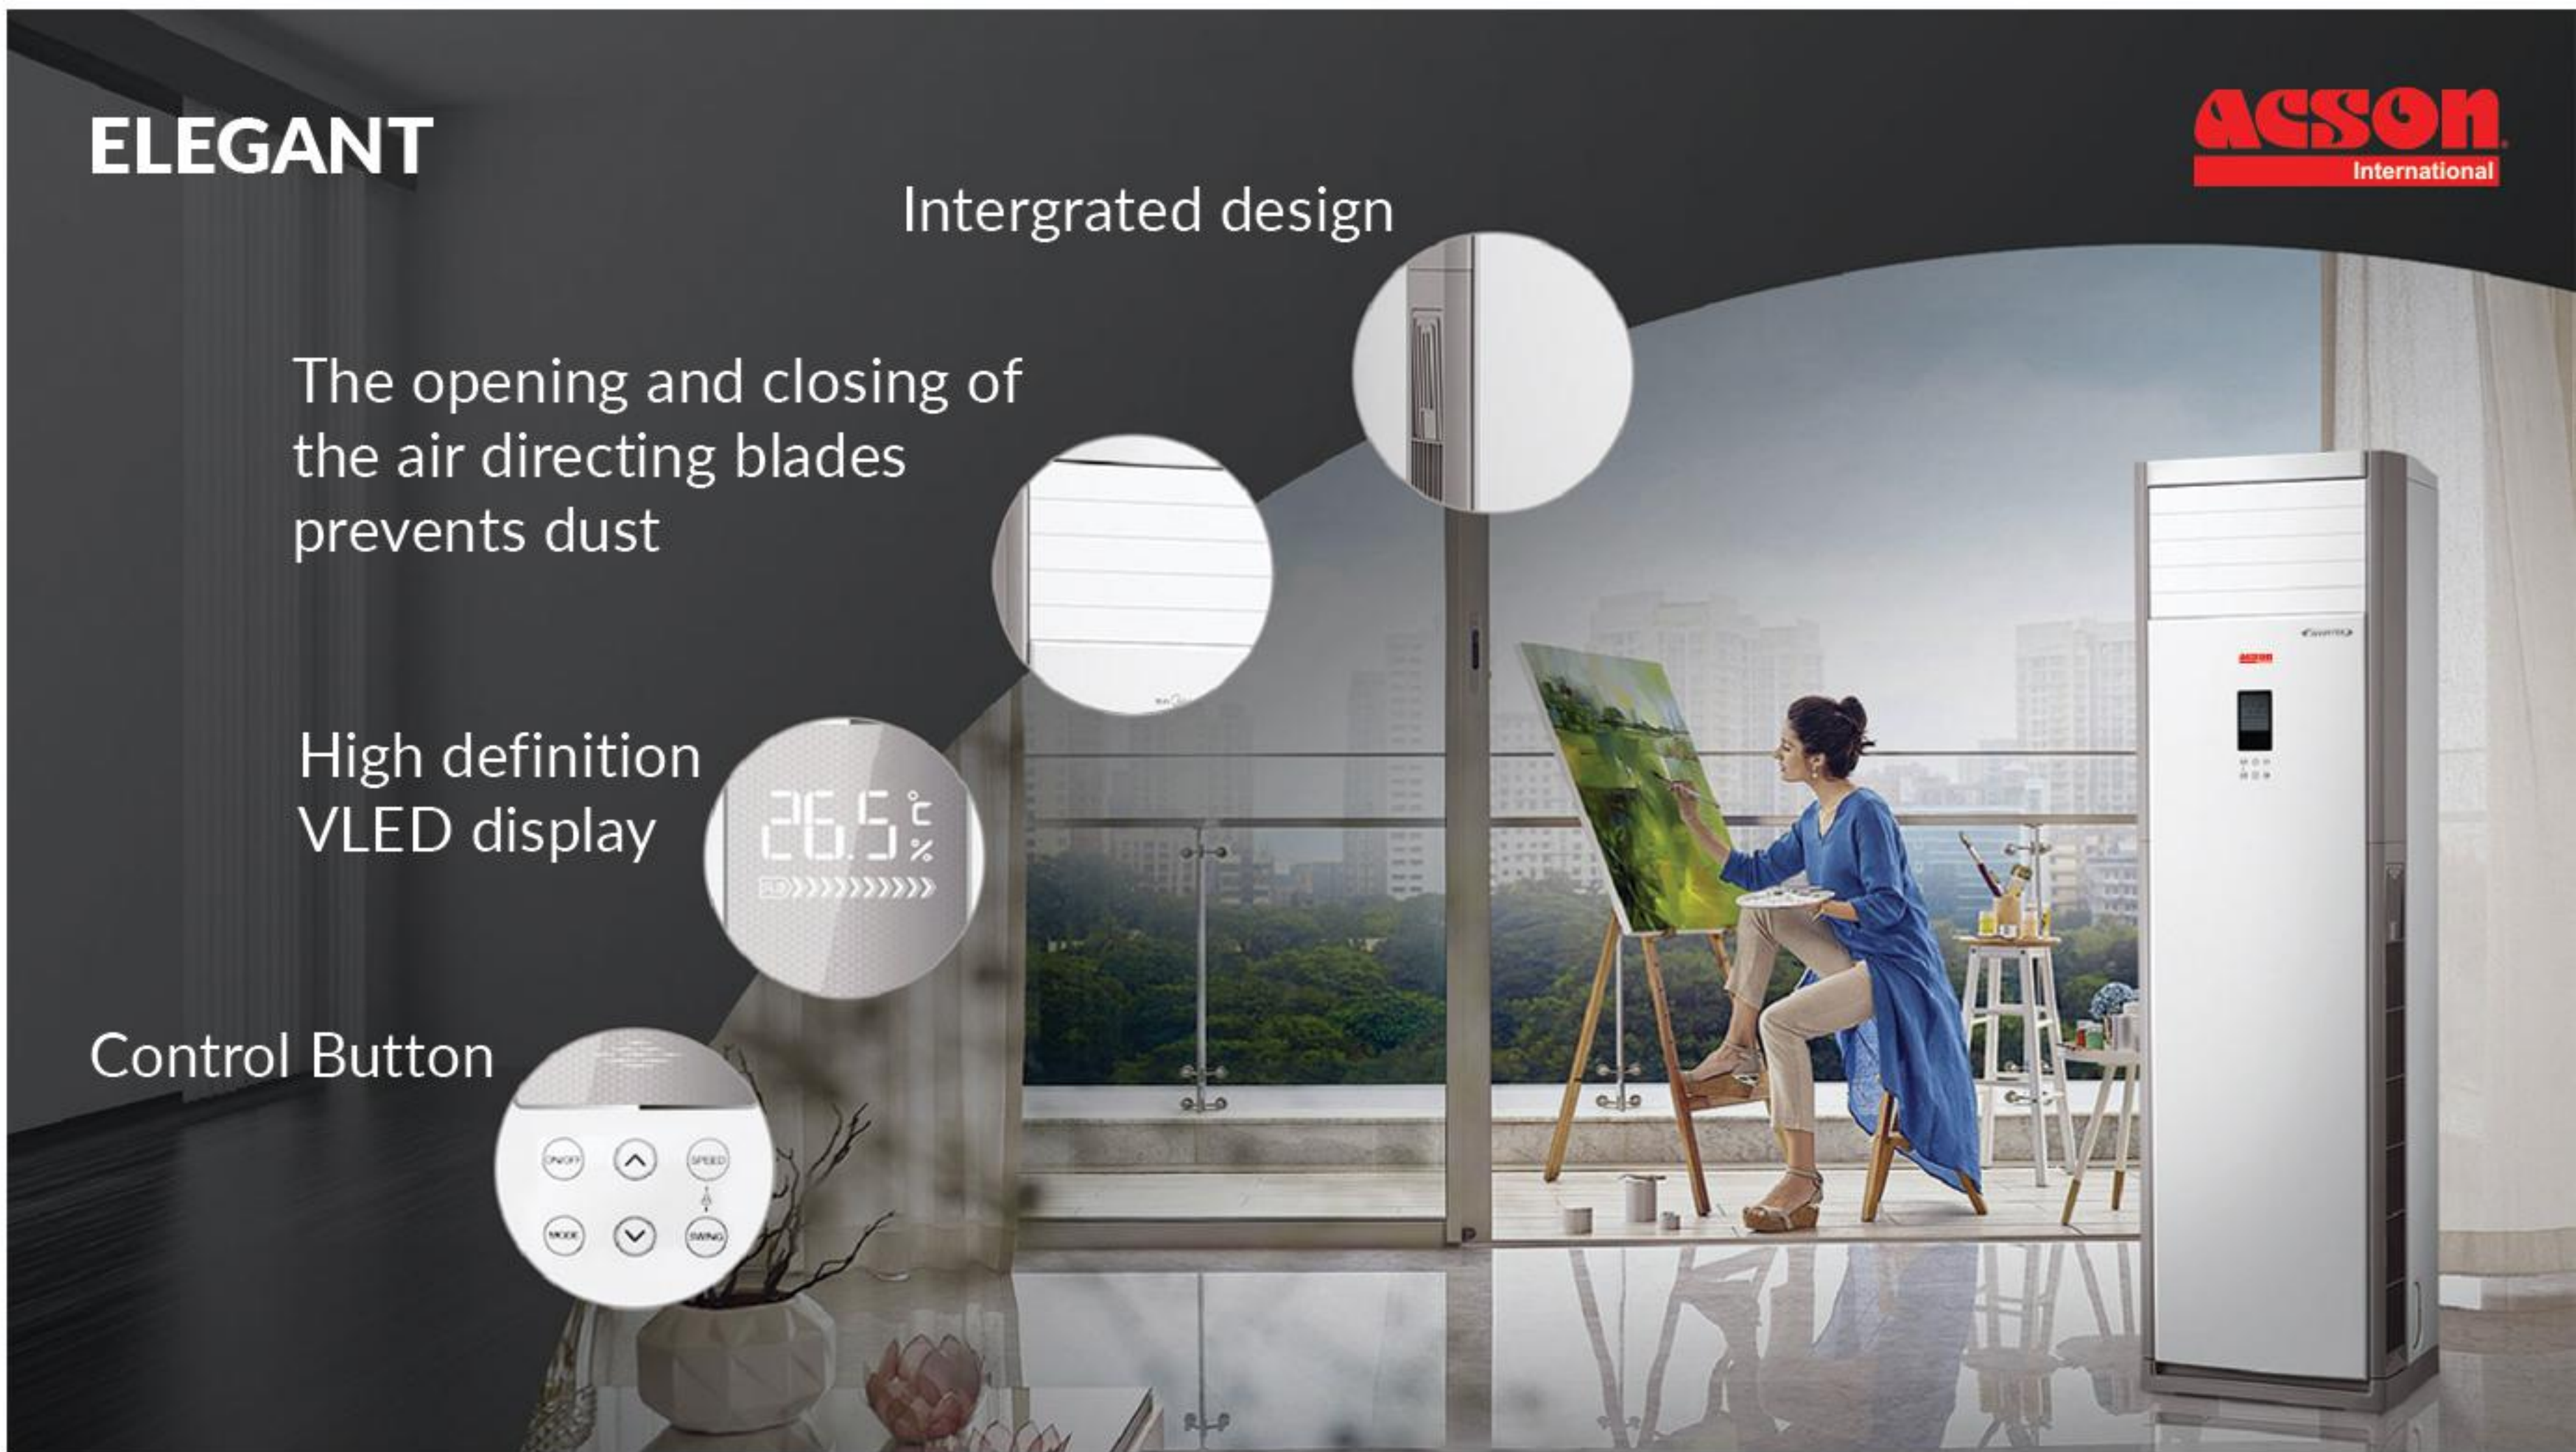



Follow Me

The remote control has a temperature sensor built-in to sense its surrounding temperature. The unit can adjust the room temperature more accurately.

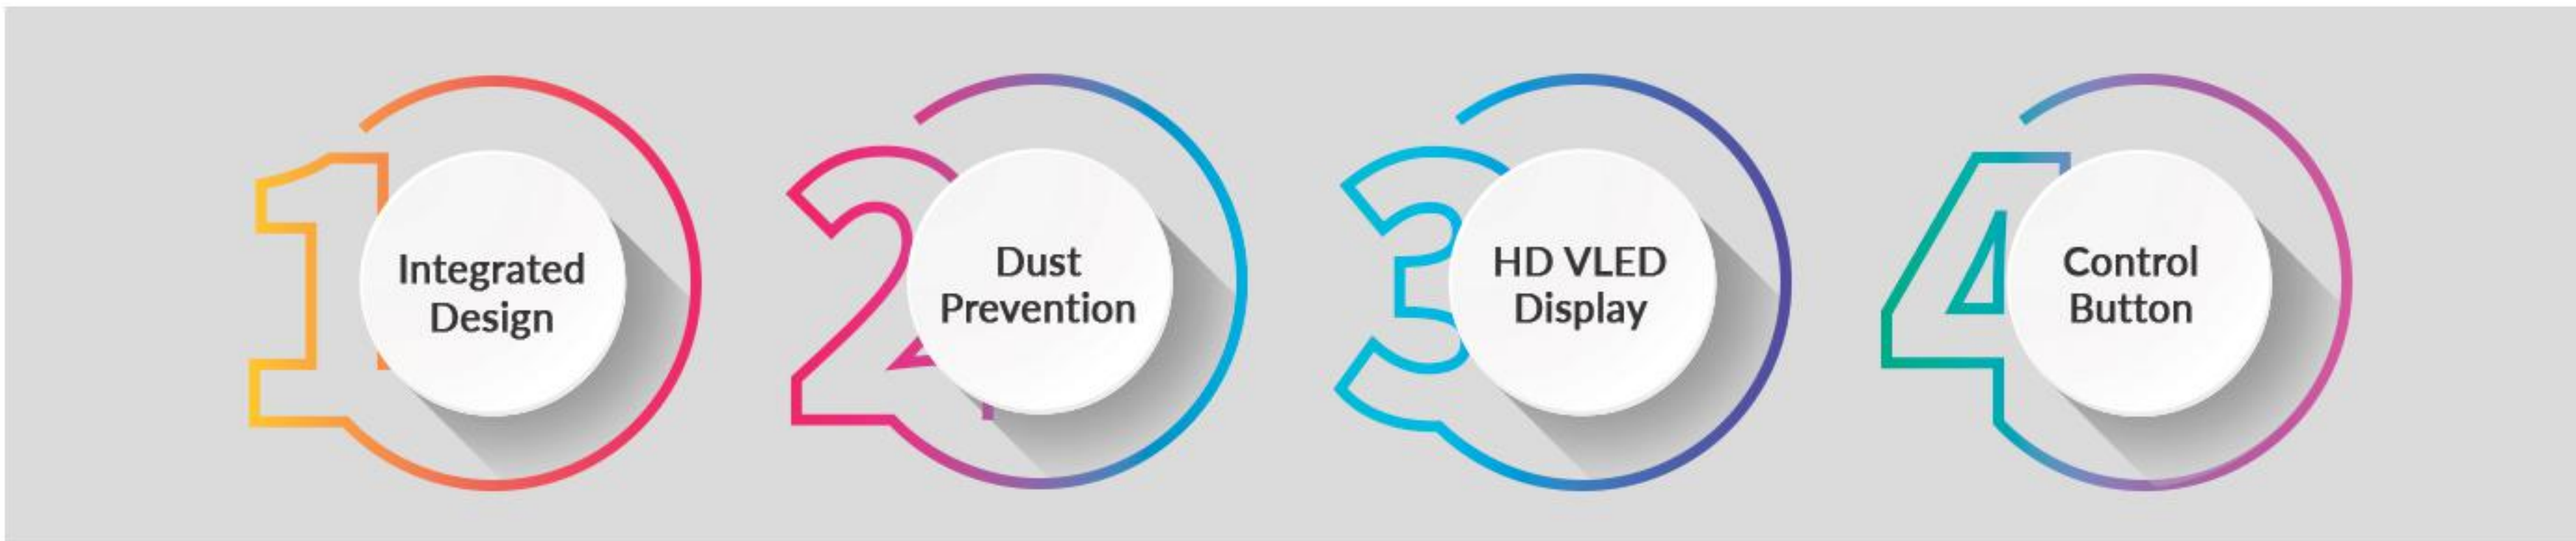

Golden Fin

The unique anticorrosive golden coating on the heat exchangers can withstand the salty air, rain and other corrosive elements.
It also effectively prevents bacteria from breeding and improves heat efficiency.

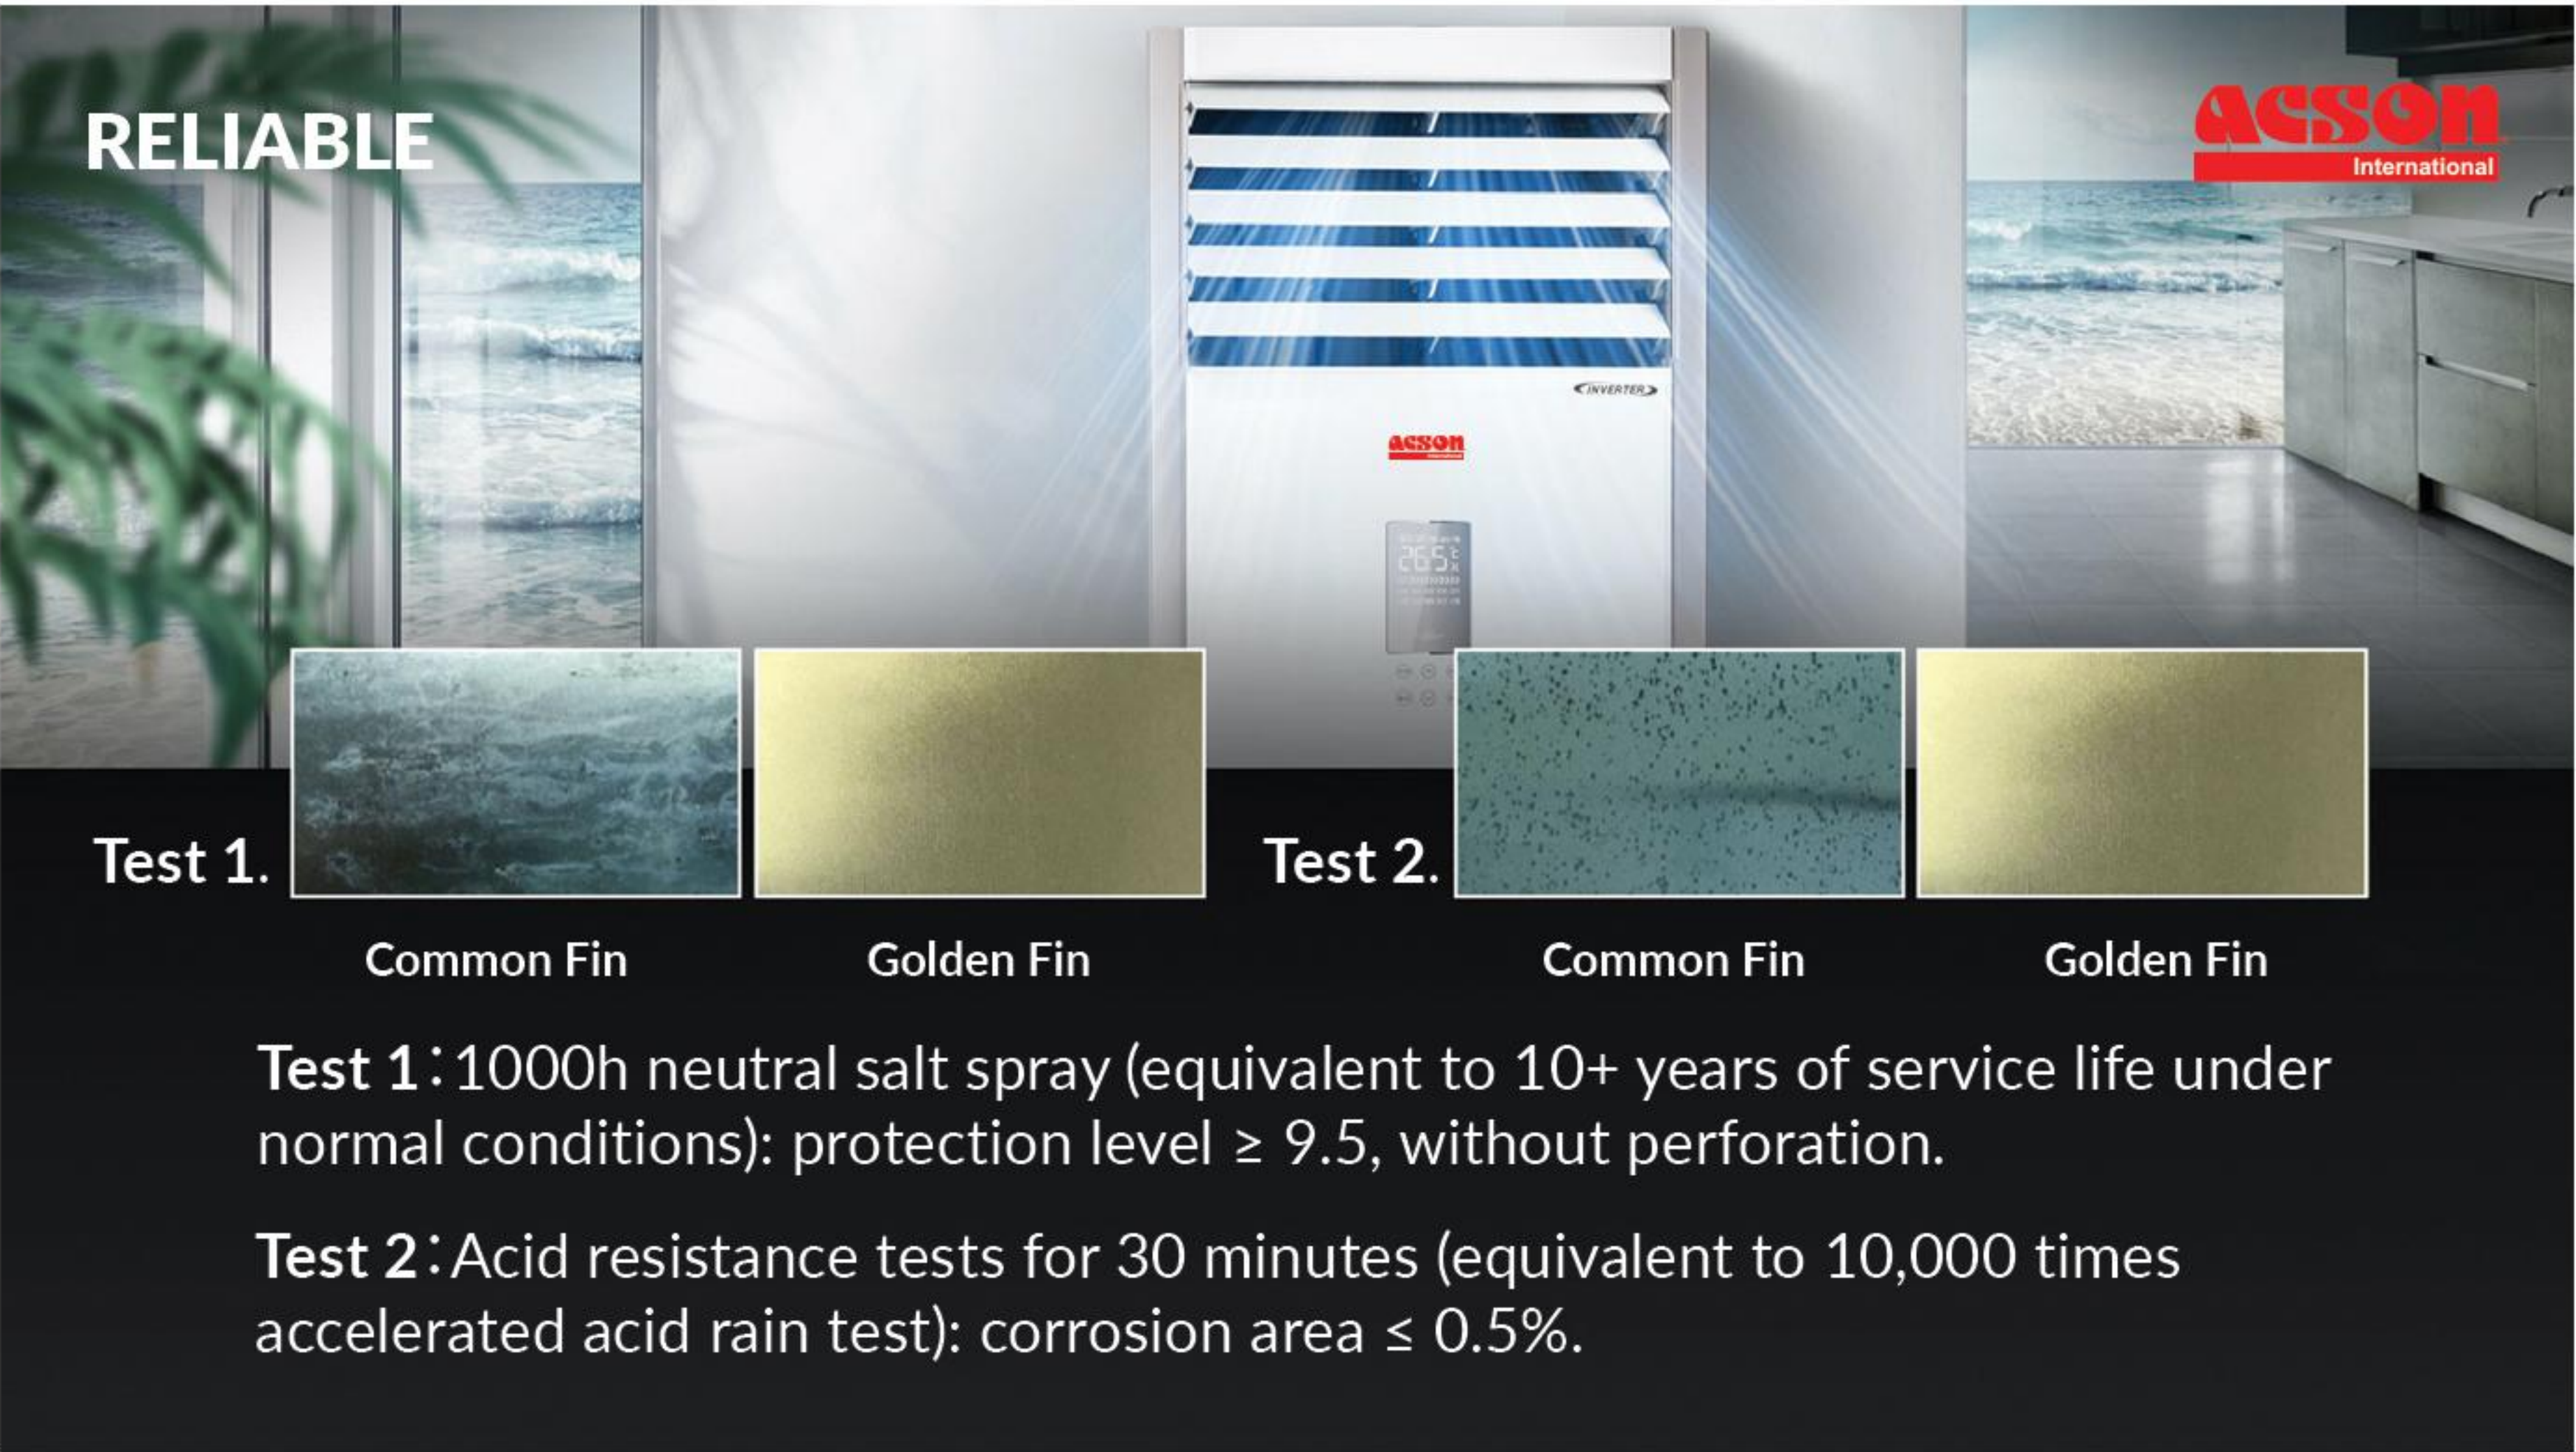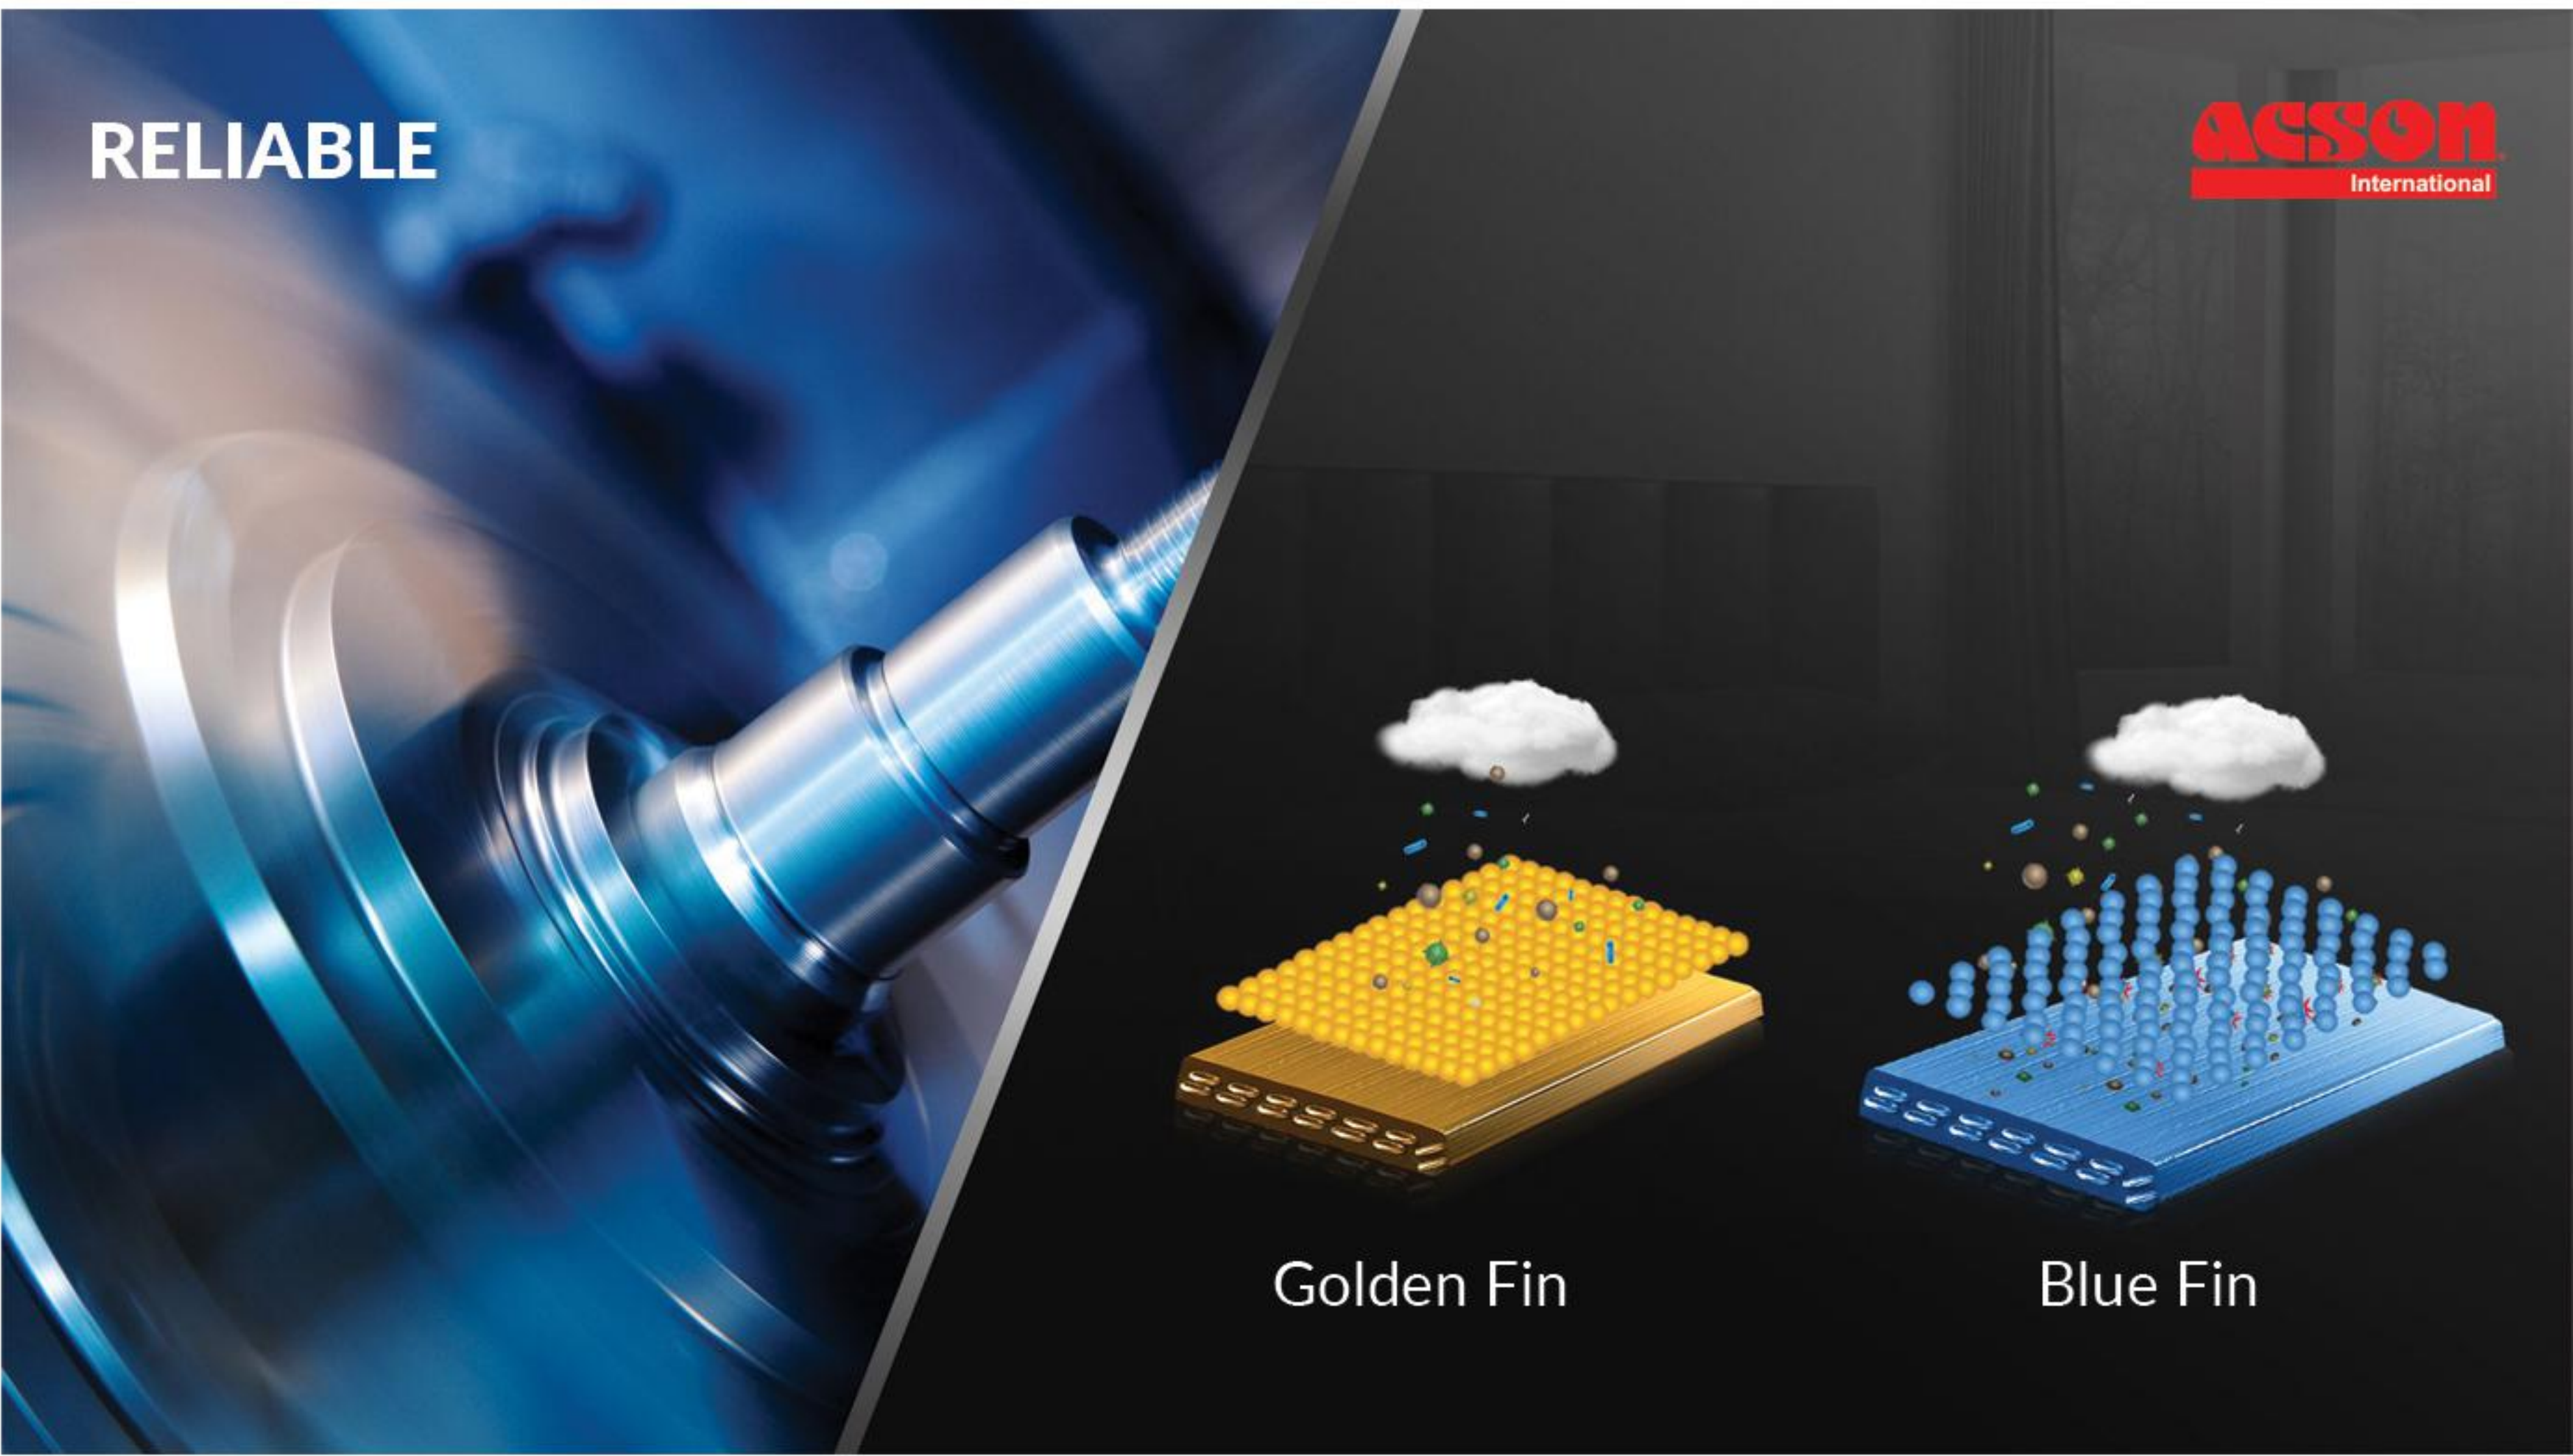

INVERTER FLOOR STANDING TYPE UNIT (SPECIFICATIONS)

Indoor			A5FSY50FR-M
Outdoor			A5LCY50CR-M
Power Supply		V/Ph/Hz	380 - 415/3/50
Cooling	Capacity	Btu/h	50000 (20000 - 55000)
	Input Power	W	5300 (2120 - 5830)
	Operating Current	A	8.8 (3.7 - 10.2)
	EER	W/W	2.76
Heating	Capacity	Btu/h	55000 (22000 - 60500)
	Input Power	W	4900 (1960 - 5390)
	Operating Current	A	8.0 (3.2 - 8.8)
	COP	W/W	3.29
Indoor unit	Dimension (W*D*H)	mm	585 X 405 X 1830
	Packing (W*D*H)	mm	2060 X 750 X 540
	Net/Gross Weight	kg	50.1/64.2
Indoor air flow (Hi/Mi/Lo)		m3/h	2150/1819/1577
Indoor noise level (Hi/Mi/Lo)		dB (A)	54/52/49
Outdoor unit	Dimension (W*D*H)	mm	952 X 415 X 1333
	Packing (W*D*H)	mm	1095 X 495 X 1480
	Net/Gross Weight	kg	96.8/109.8
Outdoor air flow		m3/h	7500
Outdoor noise level		dB (A)	64.0
Refrigerant type/Charge		Type/kg	R410A/4.1
Refrigerant piping	Liquid Side/Gas Side	mm (inch)	9.52mm (3/8in)/15.9mm (5/8in)
	Max. Refrigerant Pipe Length	m	50
	Max. Elevation	m	20